

EXAR INDUSTRIES

Aspiring Excellence



EXAR INDUSTRIES
Aspiring Excellence

AN ISO 9001:2008 COMPANY





Company Profile	04
Cable Lugs	
Heavy Duty Cable Lugs	05
Heavy Duty Long Barrel Cable Lugs	07
Medium Duty Cable lugs	09
Medium Duty Long Barrel Cable Lugs	11
Heavy Duty Cable Lugs Without Inspection Window	13
Cable Lugs to Din 46235 Standard	15
Bell Mouth Type Cable Lugs	17
Long Palm Cable Lugs	18
Twin Hole Cable Lugs	19
Four Hole Cable Lugs	20
Australian Standard Cable Lugs	21
Aluminium Cable Lugs	23
Ring Type Cable Lugs	25
Connectors - Heavy Duty Long Barrel	27
Connectors - Heavy Duty Short Barrel	28
T Connectors	29
Cross Connectors	30
Aluminium Connectors	31
Ring Type Insulated Cable Lugs	32
Pin Type Cable Lugs	33
Pin Type Insulated Cable Lugs	34
Fork Type Cable Lugs	35
Quality Policy	37
Notes	38



Exar Industries is a leading manufacturer of Cable Terminal Ends (Cable Lugs) & Connectors. Based in Ahmedabad, India Exar has gained reputation as one of the most reputed and reliable brands in Cable Lugs. Exar's Cable Lugs are trusted and used worldwide. They are widely accepted in power generation and distribution, transformers, switchgear, circuit breakers and many other application.

Exar's electrical accessories division offers Earthing materials, Lightning protection equipment, Copper busbars, Cable glands, Din rail, making it a one stop solution for the customers.

Founded by first generation entrepreneurs, the corporate leadership of the company is young and poised to lead the company to greater heights. Exar is backed by technocrats with in-depth knowledge and years of experience in the electrical industry.

We constantly strive to, develop better products, seek more efficient ways to do business, whether it is by implementing cutting-edge technology, increasing the number of services we provide, or expanding our network.

Exar Industries transition from a small company to what we are today is due to our passion for excellence. Our constant emphasis on continuous improvement is the reason for past achievements, the foundation for future success and the values which make us the right choice for you today. Exar is backed by state of the art infrastructure with a dedicated and diligent work force. At Exar, we follow modern and best production processes to achieve optimal result. Our wide distribution network of suppliers and distributors ensures prompt, safe and smooth delivery of the product to the customers.

Core Values

Core values of Exar Industries are influenced by our past, tempered by our present and are designed to shape our future. They are an amalgam of what we have been, what we are and what we want to be.

Team Work

Exar Industries believe in teamwork and we attribute our prosperity to the efforts of our employees. Their commitment, efficiency, hard work and dedication have helped us expand its scope. Our team or our extended family also includes our channel partners and users. Extra care is taken to ensure that their specific needs are met.


Company Mission

To be the most trusted partner of our customers by providing quality products and outstanding services. To lead by innovation, excel by expertise and emerge as the foremost Indian industrial enterprise with a global recognition.

Company Vision

Exar aspires to be a Global Leader in the Cable Terminal Ends (Cable Lugs), Connectors & Electrical Accessories segment.

Heavy Duty Cable Lugs

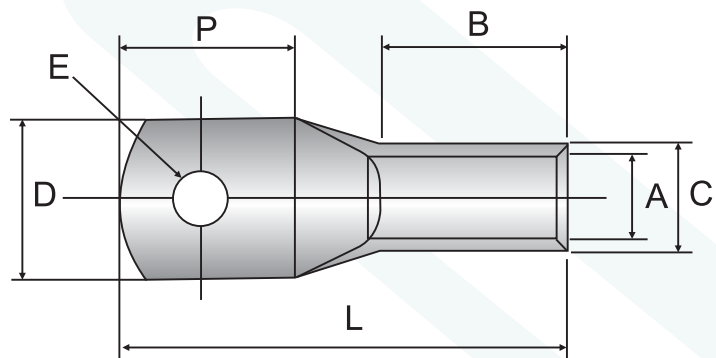


Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
1.5	4.2	1.8	3.7	8	5	9	16	EXHD 1.5/4
1.5	5.5	1.8	3.7	8	5	9	16	EXHD 1.5/5
1.5	6.5	1.8	3.7	10	5	11	18	EXHD 1.5/6
2.5	4.2	2.4	4	8	7	9	18	EXHD 2.5/4
2.5	5.5	2.4	4	10	7	11	20	EXHD 2.5/5
2.5	6.5	2.4	4	10	7	11	20	EXHD 2.5/6
4	5.5	3.1	4.8	10	7	11	20	EXHD 4.0/5
4	6.5	3.1	4.8	10	7	11	20	EXHD 4.0/6
6	5.5	3.8	5.5	10	9	11	23	EXHD 6.0/5
6	6.5	3.8	5.5	12	9	15	27	EXHD 6.0/6
6	8.5	3.8	5.5	12	9	15	27	EXHD 6.0/8
10	5.5	4.5	6.2	11	9	13	25	EXHD 10/5
10	6.5	4.5	6.2	12	9	13	25	EXHD 10/6
10	8.5	4.5	6.2	12	9	15	27	EXHD 10/8
16	6.5	5.4	7.1	12	12	14	30	EXHD 16/6
16	8.5	5.4	7.1	12	12	14	30	EXHD 16/8
25	6.5	6.8	8.8	13	12	14	30	EXHD 25/6
25	8.5	6.8	8.8	18	12	21	37	EXHD 25/8
25	10.5	6.8	8.8	18	12	21	37	EXHD 25/10
35	6.5	8.2	10.6	15	12	18	35	EXHD 35/6
35	8.5	8.2	10.6	15	12	18	35	EXHD 35/8
35	10.5	8.2	10.6	18	12	21	38	EXHD 35/10
50	8.5	9.5	12.4	18	16	21	43	EXHD 50/8

Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
50	10.5	9.5	12.4	18	16	21	43	EXHD 50/10
50	12.5	9.5	12.4	18	16	23	45	EXHD 50/12
70	8.5	11.2	14.7	21	18	25	50	EXHD 70/8
70	10.5	11.2	14.7	21	18	25	50	EXHD 70/10
70	12.5	11.2	14.7	21	18	25	50	EXHD 70/12
95	10.5	13.5	17.4	25	20	26	55	EXHD 95/10
95	12.5	13.5	17.4	25	20	26	55	EXHD 95/12
120	10.5	15	19.4	28	22	28	60	EXHD 120/10
120	12.5	15	19.4	28	22	28	60	EXHD 120/12
120	17.0	15	19.4	28	22	32	64	EXHD 120/16
150	12.5	16.5	21.2	30	26	32	69	EXHD 150/12
150	14.7	16.5	21.2	30	26	32	69	EXHD 150/14
150	17.0	16.5	21.2	30	26	32	69	EXHD 150/16
185	12.5	18.5	23.5	34	32	34	78	EXHD 185/12
185	14.7	18.5	23.5	34	32	34	78	EXHD 185/14
185	17.0	18.5	23.5	34	32	34	78	EXHD 185/16
240	12.5	21	26.5	38	38	40	92	EXHD 240/12
240	14.7	21	26.5	38	38	40	92	EXHD 240/14
240	17.0	21	26.5	38	38	40	92	EXHD 240/16
240	21.0	21	26.5	38	38	40	92	EXHD 240/20
300	14.7	23.5	30	43	42	44	101	EXHD 300/14
300	17.0	23.5	30	43	42	44	101	EXHD 300/16
300	21.0	23.5	30	43	42	44	101	EXHD 300/20
400	17.0	28.5	36.5	52.5	44	52	114	EXHD 400/16
400	21.0	28.5	36.5	52.5	44	52	114	EXHD 400/20
500	17.0	30	39	56	48	56	124	EXHD 500/16
500	21.0	30	39	56	48	56	124	EXHD 500/20
630	17.0	35	45	65	56	66	144	EXHD 630/16
630	21.0	35	45	65	56	66	144	EXHD 630/20
800	Blank	39	50.6	73	78	75	170	EXHD 800/BL
1000	Blank	43	56.2	81	90	90	200	EXHD 1000/BL

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Heavy Duty Long Barrel Cable Lugs

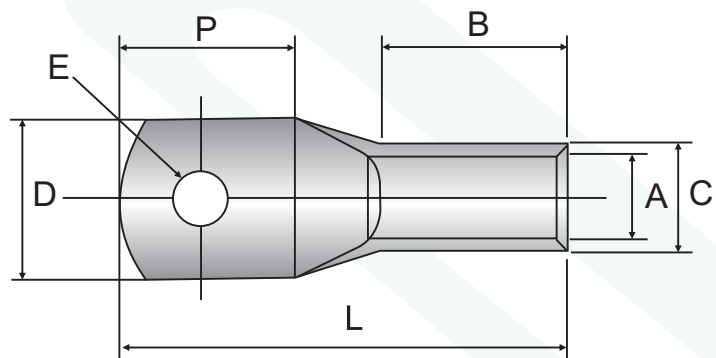


Cable Size	Stud Hole Size E	Cable Lug Dimensions						Part No.
		A	C	D	B	P	L	
1.5	4.2	1.8	3.7	8	10	9	21	EXHLB 1.5/4
1.5	5.5	1.8	3.7	8	10	9	21	EXHLB 1.5/5
1.5	6.5	1.8	3.7	10	10	11	23	EXHLB 1.5/6
2.5	4.2	2.4	4	8	10	9	21	EXHLB 2.5/4
2.5	5.5	2.4	4	10	10	11	23	EXHLB 2.5/5
2.5	6.5	2.4	4	10	10	11	23	EXHLB 2.5/6
4	5.5	3.1	4.8	10	10	11	23	EXHLB 4.0/5
4	6.5	3.1	4.8	10	10	11	23	EXHLB 4.0/6
6	5.5	3.8	5.5	10	13	11	27	EXHLB 6.0/5
6	6.5	3.8	5.5	12	13	15	31	EXHLB 6.0/6
6	8.5	3.8	5.5	12	13	15	31	EXHLB 6.0/8
10	5.5	4.5	6.2	11	13	13	29	EXHLB 10/5
10	6.5	4.5	6.2	12	13	13	29	EXHLB 10/6
10	8.5	4.5	6.2	12	13	15	31	EXHLB 10/8
16	6.5	5.4	7.1	12	18	14	36	EXHLB 16/6
16	8.5	5.4	7.1	12	18	14	36	EXHLB 16/8
25	6.5	6.8	8.8	13	20	14	38	EXHLB 25/6
25	8.5	6.8	8.8	18	20	21	45	EXHLB 25/8
25	10.5	6.8	8.8	18	20	21	45	EXHLB 25/10
35	6.5	8.2	10.6	15	20	18	43	EXHLB 35/6
35	8.5	8.2	10.6	15	20	18	43	EXHLB 35/8
35	10.5	8.2	10.6	18	20	21	46	EXHLB 35/10
50	8.5	9.5	12.4	18	23	21	50	EXHLB 50/8

Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
50	10.5	9.5	12.4	18	23	21	50	EXHLB 50/10
50	12.5	9.5	12.4	18	23	23	52	EXHLB 50/12
70	8.5	11.2	14.7	21	25	25	57	EXHLB 70/8
70	10.5	11.2	14.7	21	25	25	57	EXHLB 70/10
70	12.5	11.2	14.7	21	25	25	57	EXHLB 70/12
95	10.5	13.5	17.4	25	30	26	65	EXHLB 95/10
95	12.5	13.5	17.4	25	30	26	65	EXHLB 95/12
120	10.5	15	19.4	28	33	28	71	EXHLB 120/10
120	12.5	15	19.4	28	33	28	71	EXHLB 120/12
120	17.0	15	19.4	28	33	32	75	EXHLB 120/16
150	12.5	16.5	21.2	30	39	32	82	EXHLB 150/12
150	14.7	16.5	21.2	30	39	32	82	EXHLB 150/14
150	17.0	16.5	21.2	30	39	32	82	EXHLB 150/16
185	12.5	18.5	23.5	34	45	34	91	EXHLB 185/12
185	14.7	18.5	23.5	34	45	34	91	EXHLB 185/14
185	17.0	18.5	23.5	34	45	34	91	EXHLB 185/16
240	12.5	21	26.5	38	50	40	104	EXHLB 240/12
240	14.7	21	26.5	38	50	40	104	EXHLB 240/14
240	17.0	21	26.5	38	50	40	104	EXHLB 240/16
240	21.0	21	26.5	38	50	40	104	EXHLB 240/20
300	14.7	23.5	30	43	55	44	114	EXHLB 300/14
300	17.0	23.5	30	43	55	44	114	EXHLB 300/16
300	21.0	23.5	30	43	55	44	114	EXHLB 300/20
400	17.0	28.5	36.5	52.5	66	52	136	EXHLB 400/16
400	21.0	28.5	36.5	52.5	66	52	136	EXHLB 400/20
500	17.0	30	39	56	72	56	148	EXHLB 500/16
500	21.0	30	39	56	72	56	148	EXHLB 500/20
630	17.0	35	45	65	80	66	168	EXHLB 630/16
630	21.0	35	45	65	80	66	168	EXHLB 630/20
800	Blank	39	50.6	73	98	75	190	EXHLB 800/BL
1000	Blank	43	56.2	81	125	90	235	EXHLB 1000/BL

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Medium Duty Cable Lugs

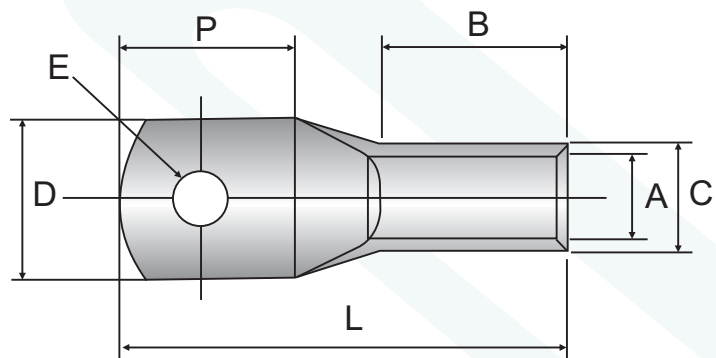


Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
1.5	4.2	1.8	3.7	8	5	9	16	EXMD 1.5/4
1.5	5.5	1.8	3.7	8	5	9	16	EXMD 1.5/5
1.5	6.5	1.8	3.7	10	5	11	18	EXMD 1.5/6
2.5	4.2	2.4	4	8	7	9	18	EXMD 2.5/4
2.5	5.5	2.4	4	10	7	11	20	EXMD 2.5/5
2.5	6.5	2.4	4	10	7	11	20	EXMD 2.5/6
4	5.5	3.1	4.8	10	7	11	20	EXMD 4.0/5
4	6.5	3.1	4.8	10	7	11	20	EXMD 4.0/6
6	5.5	3.8	5.5	10	9	11	23	EXMD 6.0/5
6	6.5	3.8	5.5	12	9	15	27	EXMD 6.0/6
6	8.5	3.8	5.5	12	9	15	27	EXMD 6.0/8
10	5.5	4.5	6.2	11	9	13	25	EXMD 10/5
10	6.5	4.5	6.2	12	9	13	25	EXMD 10/6
10	8.5	4.5	6.2	12	9	15	27	EXMD 10/8
16	6.5	5.4	7.1	12	12	14	30	EXMD 16/6
16	8.5	5.4	7.1	12	12	14	30	EXMD 16/8
25	6.5	6.8	8.8	13	12	14	30	EXMD 25/6
25	8.5	6.8	8.8	18	12	21	37	EXMD 25/8
25	10.5	6.8	8.8	18	12	21	37	EXMD 25/10
35	6.5	8.0	10.0	15	12	18	35	EXMD 35/6
35	8.5	8.0	10.0	15	12	18	35	EXMD 35/8
35	10.5	8.0	10.0	18	12	21	38	EXMD 35/10
50	8.5	9.2	11.2	18	16	21	43	EXMD 50/8

Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
50	10.5	9.2	11.2	18	16	21	43	EXMD 50/10
50	12.5	9.2	11.2	18	16	23	45	EXMD 50/12
70	8.5	11.5	13.8	21	18	25	50	EXMD 70/8
70	10.5	11.5	13.8	21	18	25	50	EXMD 70/10
70	12.5	11.5	13.8	21	18	25	50	EXMD 70/12
95	10.5	12.8	15.6	25	20	26	55	EXMD 95/10
95	12.5	12.8	15.6	25	20	26	55	EXMD 95/12
120	10.5	14.8	17.8	28	22	28	60	EXMD 120/10
120	12.5	14.8	17.8	28	22	28	60	EXMD 120/12
120	17.0	14.8	17.8	28	22	32	64	EXMD 120/16
150	12.5	16	19.6	30	26	32	69	EXMD 150/12
150	14.7	16	19.6	30	26	32	69	EXMD 150/14
150	17.0	16	19.6	30	26	32	69	EXMD 150/16
185	12.5	18	22	34	32	34	78	EXMD 185/12
185	14.7	18	22	34	32	34	78	EXMD 185/14
185	17.0	18	22	34	32	34	78	EXMD 185/16
240	12.5	22	26	38	38	40	92	EXMD 240/12
240	14.7	22	26	38	38	40	92	EXMD 240/14
240	17.0	22	26	38	38	40	92	EXMD 240/16
240	21.0	22	26	38	38	40	92	EXMD 240/20
300	14.7	24	28.7	43	42	44	101	EXMD 300/14
300	17.0	24	28.7	43	42	44	101	EXMD 300/16
300	21.0	24	28.7	43	42	44	101	EXMD 300/20
400	17.0	28.5	33.2	52.5	44	52	114	EXMD 400/16
400	21.0	28.5	33.2	52.5	44	52	114	EXMD 400/20
500	17.0	30	36	56	48	56	124	EXMD 500/16
500	21.0	30	36	56	48	56	124	EXMD 500/20
630	17.0	35	41.5	65	56	66	144	EXMD 630/16
630	21.0	35	41.5	65	56	66	144	EXMD 630/20
800	Blank	39	46.3	73	78	75	170	EXMD 800/BL
1000	Blank	43	52.2	81	90	90	200	EXMD 1000/BL

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Medium Duty Long Barrel Cable Lugs

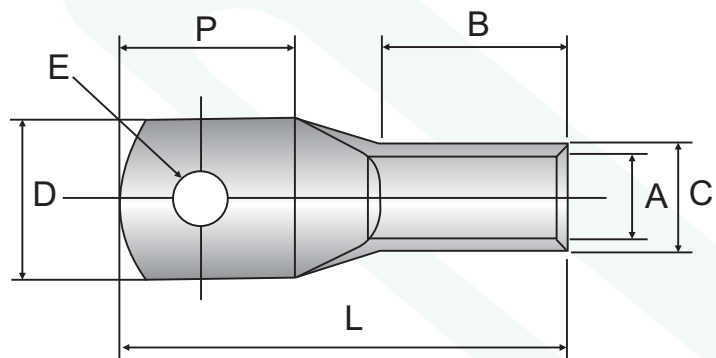


Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
1.5	4.2	1.8	3.7	8	10	9	21	EXMLB 1.5/4
1.5	5.5	1.8	3.7	8	10	9	21	EXMLB 1.5/5
1.5	6.5	1.8	3.7	10	10	11	23	EXMLB 1.5/6
2.5	4.2	2.4	4	8	10	9	21	EXMLB 2.5/4
2.5	5.5	2.4	4	10	10	11	23	EXMLB 2.5/5
2.5	6.5	2.4	4	10	10	11	23	EXMLB 2.5/6
4	5.5	3.1	4.8	10	10	11	23	EXMLB 4.0/5
4	6.5	3.1	4.8	10	10	11	23	EXMLB 4.0/6
6	5.5	3.8	5.5	10	13	11	27	EXMLB 6.0/5
6	6.5	3.8	5.5	12	13	15	31	EXMLB 6.0/6
6	8.5	3.8	5.5	12	13	15	31	EXMLB 6.0/8
10	5.5	4.5	6.2	11	13	13	29	EXMLB 10/5
10	6.5	4.5	6.2	12	13	13	29	EXMLB 10/6
10	8.5	4.5	6.2	12	13	15	31	EXMLB 10/8
16	6.5	5.4	7.1	12	18	14	36	EXMLB 16/6
16	8.5	5.4	7.1	12	18	14	36	EXMLB 16/8
25	6.5	6.8	8.8	13	20	14	38	EXMLB 25/6
25	8.5	6.8	8.8	18	20	21	45	EXMLB 25/8
25	10.5	6.8	8.8	18	20	21	45	EXMLB 25/10
35	6.5	8.0	10.0	15	20	18	43	EXMLB 35/6
35	8.5	8.0	10.0	15	20	18	43	EXMLB 35/8
35	10.5	8.0	10.0	18	20	21	46	EXMLB 35/10
50	8.5	9.2	11.2	18	23	21	50	EXMLB 50/8

Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
50	10.5	9.2	11.2	18	23	21	50	EXMLB 50/10
50	12.5	9.2	11.2	18	23	23	52	EXMLB 50/12
70	8.5	11.5	13.8	21	25	25	57	EXMLB 70/8
70	10.5	11.5	13.8	21	25	25	57	EXMLB 70/10
70	12.5	11.5	13.8	21	25	25	57	EXMLB 70/12
95	10.5	12.8	15.6	25	30	26	65	EXMLB 95/10
95	12.5	12.8	15.6	25	30	26	65	EXMLB 95/12
120	10.5	14.8	17.8	28	33	28	71	EXMLB 120/10
120	12.5	14.8	17.8	28	33	28	71	EXMLB 120/12
120	17.0	14.8	17.8	28	33	32	75	EXMLB 120/16
150	12.5	16	19.6	30	39	32	82	EXMLB 150/12
150	14.7	16	19.6	30	39	32	82	EXMLB 150/14
150	17.0	16	19.6	30	39	32	82	EXMLB 150/16
185	12.5	18	22	34	45	34	91	EXMLB 185/12
185	14.7	18	22	34	45	34	91	EXMLB 185/14
185	17.0	18	22	34	45	34	91	EXMLB 185/16
240	12.5	22	26	38	50	40	104	EXMLB 240/12
240	14.7	22	26	38	50	40	104	EXMLB 240/14
240	17.0	22	26	38	50	40	104	EXMLB 240/16
240	21.0	22	26	38	50	40	104	EXMLB 240/20
300	14.7	24	28.7	43	55	44	114	EXMLB 300/14
300	17.0	24	28.7	43	55	44	114	EXMLB 300/16
300	21.0	24	28.7	43	55	44	114	EXMLB 300/20
400	17.0	28.5	33.2	52.5	66	52	136	EXMLB 400/16
400	21.0	28.5	33.2	52.5	66	52	136	EXMLB 400/20
500	17.0	30	36	56	72	56	148	EXMLB 500/16
500	21.0	30	36	56	72	56	148	EXMLB 500/20
630	17.0	35	41.5	65	80	66	168	EXMLB 630/16
630	21.0	35	41.5	65	80	66	168	EXMLB 630/20
800	Blank	39	46.3	73	98	75	190	EXMLB 800/BL
1000	Blank	43	52.2	81	125	90	235	EXMLB 1000/BL

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Heavy Duty Cable Lugs Without Inspection Window

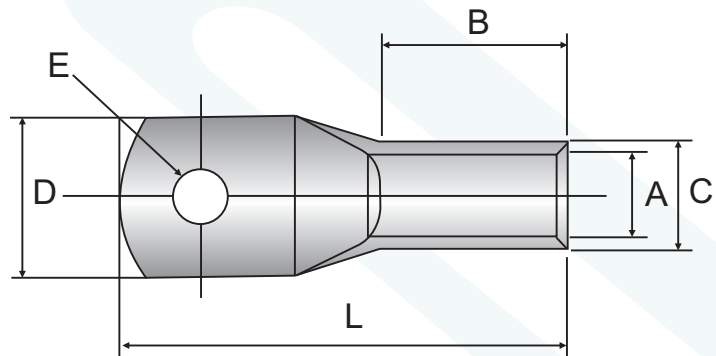


Cable Size	Stud Hole Size	Cable Lug Dimensions					Part No.
	E	A	C	D	B	L	
1.5	4.2	1.8	3.7	8	10	21	EXN 1.5/4
1.5	5.5	1.8	3.7	8	10	21	EXN 1.5/5
1.5	6.5	1.8	3.7	10	10	23	EXN 1.5/6
2.5	4.2	2.4	4	8	10	21	EXN 2.5/4
2.5	5.5	2.4	4	10	10	23	EXN 2.5/5
2.5	6.5	2.4	4	10	10	23	EXN 2.5/6
4	5.5	3.1	4.8	10	10	23	EXN 4.0/5
4	6.5	3.1	4.8	10	10	23	EXN 4.0/6
6	6.4	4	6	10	10	26	EXN 6.0/6
10	6.5	4.4	6	10	11	28	EXN 10/6
10	8.5	4.4	6	13	12	30	EXN 10/8
16	6.5	5.5	8	12	14	32	EXN 16/6
16	8.5	5.5	8	15	14	34	EXN 16/8
16	10.5	5.5	8	16	14	34	EXN 16/10
25	8.5	6.8	9	14.5	13	33	EXN 25/8
25	10.5	6.8	9	17	13	33	EXN 25/10
35	6.5	8.2	11	15	16	37	EXN 35/6
35	8.5	8.2	11	15	16	41	EXN 35/8
35	10.5	8.2	11	18	16	41	EXN 35/10
50	8.5	8.2	11	16	20	46	EXN 50/8
50	10.5	8.2	11	16	20	50	EXN 50/10
50	12.5	8.2	11	18	20	50	EXN 50/12
70	10.5	11.2	14.5	21	22	53	EXN 70/10

Cable Size	Stud Hole Size	Cable Lug Dimensions					Part No.
	E	A	C	D	B	L	
70	13	11.2	14.5	22	22	53	EXN 70/12
70	17	11.2	14.5	26	27	63	EXN 70/16
95	10.5	13.5	17	25	24	58	EXN 95/10
95	13	13.5	17	25	24	58	EXN 95/12
120	10.5	15	19.5	28	28	64	EXN 120/10
120	13	15	19.5	28	28	64	EXN 120/12
150	8.5	16.5	21	31	32	72	EXN 150/8
150	10.5	16.5	21	31	32	72	EXN 150/10
150	13	16.5	21	31	32	72	EXN 150/12
150	15	16.5	21	31	32	72	EXN 150/14
150	17	16.5	21	31	32	72	EXN 150/16
150	21	16.5	21	31	32	72	EXN 150/20
185	10.5	19	24	39	35	81	EXN 185/10
185	13	19	24	39	35	81	EXN 185/12
185	15	19	24	39	35	81	EXN 185/14
185	17	19	24	39	35	81	EXN 185/16
185	21	19	24	39	35	84	EXN 185/20
240	10.5	21	26	39	42	94	EXN 240/10
240	13	21	26	39	42	94	EXN 240/12
240	15	21	26	39	42	94	EXN 240/14
240	17	21	26	39	42	94	EXN 240/16
300	13	23.5	29.5	43	47	102	EXN 300/12
300	15	23.5	29.5	43	47	102	EXN 300/14
300	17	23.5	29.5	43	47	106	EXN300/16
300	21	23.5	29.5	43	47	106	EXN 300/20
400	17	27	34	49	47	113	EXN 400/16
400	21	27	34	49	47	113	EXN 400/20
500	17	31	38	56	73	142	EXN 500/16
500	21	31	38	56	73	142	EXN 500/20
630	17	34	40	59	73	145	EXN 630/16
630	21	34	40	59	73	145	EXN 630/20

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Cable Lugs to DIN 46235 Standard

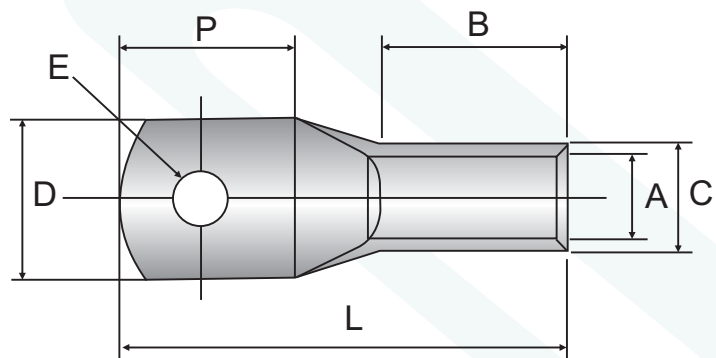


Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
6	5.3	3.8	5.5	8.5	10	15	33	EXD 6.0/6
10	6.5	4.5	6	9	10	18.5	37.5	EXD 10/6
16	6.5	5.5	8.5	12	20	18.5	46.5	EXD 16/6
16	8.4	5.5	8.5	12	20	23	49	EXD 16/8
16	10.5	5.5	8.5	17	20	27	51	EXD 16/10
16	13	5.5	8.5	19	20	27	51	EXD 16/12
25	6.5	7	10	15	20	18.5	48.5	EXD 25/6
25	8.4	7	10	15	20	23	51	EXD 25/8
25	10.5	7	10	17	20	27	53	EXD 25/10
25	13	7	10	19	20	27	53	EXD 25/12
35	8.4	8.2	12.5	17	20	23	55	EXD 35/8
35	10.5	8.2	12.5	19	20	27	57	EXD 35/10
35	13	8.2	12.5	21	20	27	57	EXD 35/12
50	8.4	10	14.5	22	28	23	65	EXD 50/8
50	10.5	10	14.5	22	28	27	67	EXD 50/10
50	13	10	14.5	23	28	27	67	EXD 50/12
50	17	10	14.5	28	28	33	70	EXD 50/16
70	8.4	11.5	16.5	24	28	23	68	EXD 70/8
70	10.5	11.5	16.5	24	28	27	70	EXD 70/10
70	13	11.5	16.5	32	28	27	70	EXD 70/12
70	17	11.5	16.5	32	28	33	74	EXD 70/16
95	10.5	13.5	19	28	35	27	80	EXD 95/10
95	13	13.5	19	28	35	27	80	EXD 95/12

Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
95	17	13.5	19	32	35	35	84	EXD 95/16
120	10.5	15.5	21	32	35	27	85	EXD 120/10
120	13	15.5	21	32	35	27	85	EXD 120/12
120	17	15.5	21	32	35	35	89	EXD 120/16
120	21	15.5	21	38	35	42	92	EXD 120/20
150	10.5	17	23.5	34	35	27	94	EXD 150/10
150	13	17	23.5	34	35	27	94	EXD 150/12
150	17	17	23.5	34	35	35	97	EXD 150/16
150	21	17	23.5	40	35	42	99	EXD 150/20
185	10.5	19	25.5	40	40	31	97	EXD 185/10
185	13	19	25.5	40	40	31	97	EXD 185/12
185	17	19	25.5	40	40	35	101	EXD 185/16
185	21	19	25.5	40	40	42	104	EXD 185/20
240	10.5	21.5	29	42	40	31	107	EXD 240/10
240	13	21.5	29	42	40	31	107	EXD 240/12
240	17	21.5	29	42	40	35	111	EXD 240/16
240	21	21.5	29	45	40	42	114	EXD 240/20
300	17	24	32	48	50	35	119	EXD 300/16
300	21	24	32	48	50	42	122	EXD 300/20
400	17	27.5	38.5	55	70	41	140	EXD 400/16
400	21	27.5	38.5	55	70	45	140	EXD 400/20
500	21	31	42	60	70	45	150	EXD 500/20
630	21	34.5	44	60	80	45	160	EXD 630/20
800	21	40	52	75	100	45	190	EXD 800/20
1000	21	44	58	85	100	45	190	EXD 1000/20

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 6 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Bell Mouth Type Cable Lugs

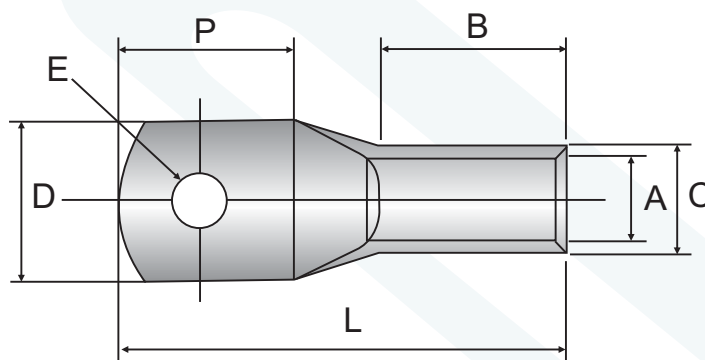


Cable Size	Stud Hole Size E	Cable Lug Dimensions						Part No.
		A	C	D	B	P	L	
10	6.5	4.5	6.2	12	10	13	26	EXBM 10/6
10	8.5	4.5	6.2	12	10	15	28	EXBM 10/8
16	6.5	5.4	7.1	12	12	14	30	EXBM 16/6
16	8.5	5.4	7.1	12	12	14	30	EXBM 16/8
25	6.5	6.8	8.8	13	12	14	30	EXBM 25/6
25	8.5	6.8	8.8	18	12	21	37	EXBM 25/8
35	6.5	8.2	10.6	15	13	18	36	EXBM 35/6
35	8.5	8.2	10.6	15	13	18	36	EXBM 35/8
50	8.5	9.5	12.4	18	16	21	43	EXBM 50/8
50	10.5	9.5	12.4	18	16	21	43	EXBM 50/10
70	8.5	11.2	14.7	21	18	25	50	EXBM 70/8
70	10.5	11.2	14.7	21	18	25	50	EXBM 70/10
95	10.5	13.5	17.4	25	20	26	55	EXBM 95/10
95	12.5	13.5	17.4	25	20	26	55	EXBM 95/12
120	10.5	15	19.4	28	22	28	60	EXBM 120/10
120	12.5	15	19.4	28	22	28	60	EXBM 120/12
150	12.5	16.5	21.2	30	27	32	70	EXBM 150/12
150	17.0	16.5	21.2	30	27	32	70	EXBM 150/16
185	17.0	18.5	23.5	34	33	34	79	EXBM 185/16
240	17.0	21	26.5	38	40	40	94	EXBM 240/16

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 10 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Long Palm Cable Lugs

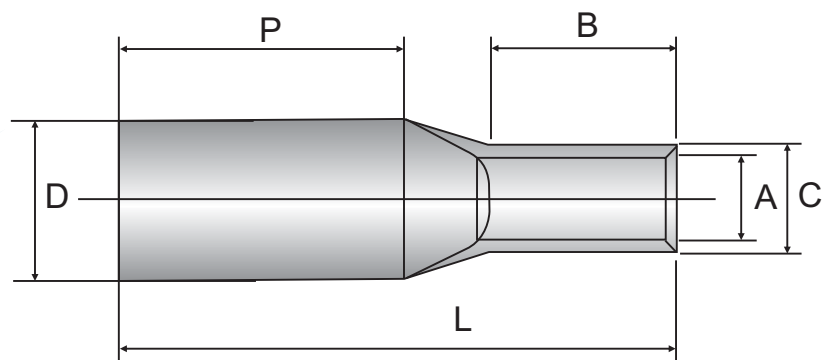


Cable Size	Cable Lug Dimensions						Part No.
	A	C	D	B	P	L	
10	4.5	6.2	11	13	75	91	EXLP 10
16	5.4	7.1	12	18	78	100	EXLP 16
25	6.8	8.8	18	20	76	100	EXLP 25
35	8.2	10.6	18	20	75	100	EXLP 35
50	9.5	12.4	18	23	80	109	EXLP 50
70	11.2	14.7	21	25	82	114	EXLP 70
95	13.5	17.4	25	30	77	116	EXLP 95
120	15	19.4	28	33	79	122	EXLP 120
150	16.5	21.2	30	39	76	126	EXLP 150
185	18.5	23.5	34	45	75	132	EXLP 185
240	21	26.5	38	50	81	145	EXLP 240
300	23.5	30	43	55	75	145	EXLP 300
400	28.5	36.5	52.5	66	76	160	EXLP 400
500	30	39	56	72	70	162	EXLP 500
630	35	45	65	80	65	167	EXLP 630

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 10 to 1000 mm²
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Twin Hole Cable Lugs

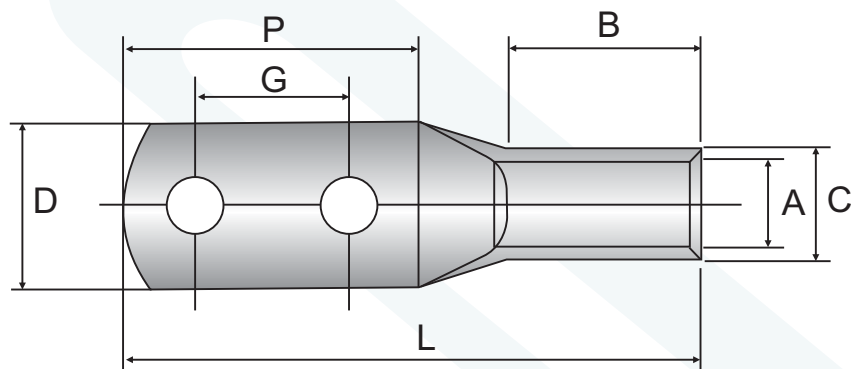


Cable Size	Stud Hole Size E	Cable Lug Dimensions							Part No.
		A	C	D	B	G	P	L	
16	10.5	5.4	7.1	14.5	18	44.5	78	100	EXTH 16/10
25	10.5	6.8	8.8	15	20	44.5	76	100	EXTH 25/10
35	10.5	8.2	10.6	16.5	20	44.5	75	100	EXTH 35/10
50	10.5	9.5	12.4	17	23	44.5	80	109	EXTH 50/10
50	12.5	9.5	12.4	17	23	44.5	80	109	EXTH 50/12
70	10.5	11.2	14.7	21	25	44.5	82	114	EXTH 70/10
70	12.5	11.2	14.7	21	25	44.5	82	114	EXTH 70/12
95	10.5	13.5	17.4	25	30	44.5	77	116	EXTH 95/10
95	12.5	13.5	17.4	25	30	44.5	77	116	EXTH 95/12
120	10.5	15	19.4	27.5	33	44.5	79	122	EXTH 120/10
120	12.5	15	19.4	27.5	33	44.5	79	122	EXTH 120/12
150	10.5	16.5	21.2	30	39	44.5	76	126	EXTH 150/10
150	12.5	16.5	21.2	30	39	44.5	76	126	EXTH 150/12
185	10.5	18.5	23.5	33.5	45	44.5	75	132	EXTH 185/10
185	12.5	18.5	23.5	33.5	45	44.5	75	132	EXTH 185/12
240	12.5	21	26.5	38.5	50	44.5	81	145	EXTH 240/12
300	12.5	23.5	30	43	55	44.5	75	145	EXTH 300/12
400	12.5	28.5	36.5	52.5	66	44.5	76	160	EXTH 400/12
500	12.5	30	39	56	72	44.5	70	162	EXTH 500/12
630	12.5	35	45	60	80	44.5	65	167	EXTH 630/12

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 10 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Four Hole Cable Lugs

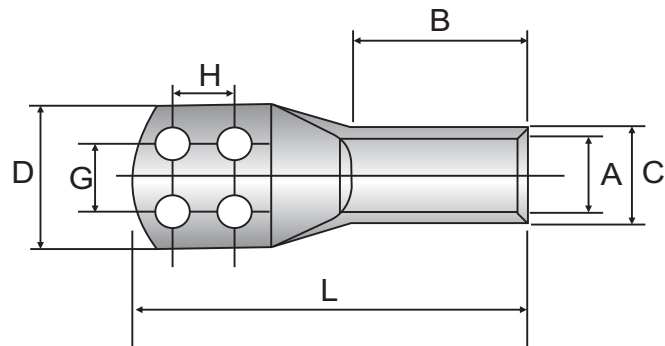


Cable Size	Stud Hole Size	Cable Lug Dimensions							Part No.
	E	A	C	D	B	H	G	L	
400	10.5	28.5	36.5	52.5	44	25	35	114	EXFH 400/10
400	12.5	28.5	36.5	52.5	44	25	35	114	EXFH 400/12
500	10.5	30	39	56	48	25	35	124	EXFH 500/10
500	12.5	30	39	56	48	25	35	124	EXFH 500/12
630	10.5	35	45	65	56	25	35	144	EXFH 630/10
630	12.5	35	45	65	56	25	35	144	EXFH 630/12
800	10.5	39	50.6	72	78	25	35	170	EXFH 800/10
800	12.5	39	50.6	72	78	25	35	170	EXFH 800/12
1000	10.5	43	56.2	78.5	90	25	35	200	EXFH 1000/10
1000	12.5	43	56.2	78.5	90	25	35	200	EXFH 1000/12

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Australian Standard Cable Lugs

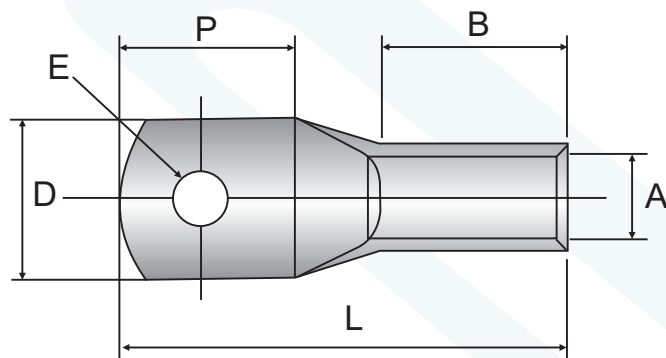


Cable Size	Stud Hole Size	Cable Lug Dimensions					Part No.
	E	A	D	B	P	L	
1.5	4.2	2	8	7.5	9	18.5	EXAT 1.5/4
1.5	5.2	2	8	7.5	9	18.5	EXAT 1.5/5
1.5	6.5	2	10	7.5	10	19.5	EXAT 1.5/6
2.5	4.2	2.5	8	8	9	19	EXAT 2.5/4
2.5	5.2	2.5	10	8	11	20	EXAT 2.5/5
2.5	6.5	2.5	10	8	11	20	EXAT 2.5/6
2.5	8.4	2.5	11	8	15	26	EXAT 2.5/8
4	5.2	3.3	10	9	11	22	EXAT 4.0/5
4	6.5	3.3	10	9	11	22	EXAT 4.0/6
4	8.4	3.3	12	9	15	26	EXAT 4.0/8
4	10.2	3.3	15	9	19	32	EXAT 4.0/10
6	5.2	3.8	10	10	11	23	EXAT 6.0/5
6	6.5	3.8	12	10	15	27	EXAT 6.0/6
6	8.4	3.8	12	10	15	27	EXAT 6.0/8
6	10.2	3.8	15	10	19	32	EXAT 6.0/10
10	6.5	4.7	12	10	13	27	EXAT 10/6
10	8.4	4.7	14	10	15	29	EXAT 10/8
10	10.5	4.7	15	10	18	32	EXAT 10/10
16	6.5	5.5	11	19	16	39	EXAT 16/6
16	8.4	5.5	14	19	16	39	EXAT 16/8
16	10.5	5.5	16	19	18	41	EXAT 16/10
25	6.5	7.1	13.5	21	16	41	EXAT 25/6
25	8.4	7.1	13.5	21	16	41	EXAT 25/8

Cable Size	Stud Hole Size	Cable Lug Dimensions					Part No.
	E	A	D	B	P	L	
25	10.5	7.1	16	21	19	44	EXAT 25/10
35	6.5	8.4	16	21	19	45	EXAT 35/6
35	8.4	8.4	16	21	19	45	EXAT 35/8
35	10.5	8.4	18	21	19	45	EXAT 35/10
50	6.5	9.5	18	22	18	46	EXAT 50/6
50	8.4	9.5	18	22	18	46	EXAT 50/8
50	10.5	9.5	18	22	18	52	EXAT 50/10
70	6.5	11.3	21	22	24	54	EXAT 70/6
70	8.4	11.3	21	24	24	54	EXAT 70/8
70	10.5	11.3	21	24	24	54	EXAT 70/10
95	10.5	13.5	25	27	26	60	EXAT 95/10
95	13	13.5	25	27	26	60	EXAT 95/12
95	17.0	13.5	25	27	30	61	EXAT 95/16
120	10.5	15.6	30	30	26	64	EXAT 120/10
120	13	15.6	30	30	26	64	EXAT 120/12
120	17.0	15.6	30	30	32	72	EXAT 120/16
150	10.5	16.7	32	30	32	71	EXAT 150/10
150	13	16.7	32	32	36	75	EXAT 150/12
150	17.0	16.7	32	30	36	75	EXAT 150/16
185	10.5	10.5	36	32	32	74	EXAT 185/10
185	13	18.5	36	32	36	79	EXAT 185/12
185	17	18.4	36	32	36	79	EXAT 185/16
240	13.0	21.2	41	38	42	92	EXAT 240/12
240	17	21.2	41	38	42	92	EXAT 240/16
300	13.0	23.8	46	42	46	101	EXAT 300/12
300	17.0	23.8	46	42	46	101	EXAT 300/16
400	Blank	26.8	50	44	48	107	EXAT 400/BL
500	Blank	30	56	50	54	119	EXAT 500/BL
630	Blank	34	64.4	58	64	139	EXAT 630/BL

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & switch gear panels.

Aluminium Cable Lugs

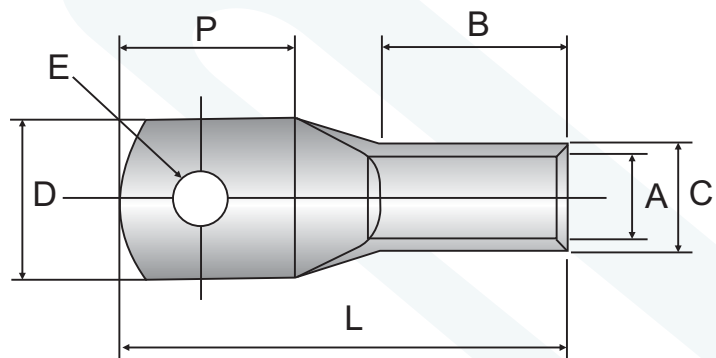


Cable Size	Stud Hole Size E	Cable Lug Dimensions						Part No.
		A	C	D	B	P	L	
2.5	4.5	2	5.5	6.6	7	8	18	EXAL 2.5/4
2.5	5.5	2.6	5.5	7	7	8	18	EXAL 2.5/5
4	4.5	2.9	5.5	7.2	7	8	18	EXAL 4.0/4
4	5.5	2.9	5.5	12	7	13	24	EXAL 4.0/5
6	5.5	3.5	5.5	7.5	7	13	24	EXAL 6.0/5
6	6.5	3.5	5.5	12	7	13	24	EXAL 6.0/6
10	5.5	3.8	6.2	8.4	7	17	28	EXAL 10/5
10	6.5	4.4	7.2	9.7	9	17	30	EXAL 10/6
10	8.5	4.4	7.2	15	9	17	30	EXAL 10/8
16	6.5	5.4	8.3	11.4	13	20	37	EXAL 16/6
16	8.5	5.4	8.3	11.4	13	20	37	EXAL 16/8
16	10.5	5.4	8.3	18	13	20	37	EXAL 16/10
25	6.5	7	9.7	13.7	16	21	44	EXAL 25/6
25	8.5	7	9.7	13.7	16	21	44	EXAL 25/8
25	10.5	7	9.7	20	16	21	44	EXAL 25/10
25	12.5	7	9.7	20	16	21	44	EXAL 25/12
35	6.5	8	10.8	15.4	18	22	47	EXAL 35/6
35	8.5	8	10.8	15.4	18	22	47	EXAL 35/8
35	10.5	8	10.8	20	18	22	47	EXAL 35/10
50	8.5	9.3	13	18.3	22	24	54	EXAL 50/8
50	10.5	9.3	13	23	22	24	54	EXAL 50/10
50	12.5	9.3	13	23	22	24	54	EXAL 50/12
70	8.5	11.6	16	22.6	26	26	60	EXAL 70/8

Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
70	10.5	11.6	16	22.6	26	26	60	EXAL 70/10
70	12.5	11.6	16	22.6	26	26	60	EXAL 70/12
95	10.5	12.9	17.1	24.5	28	28	64	EXAL 95/10
95	12.5	12.9	17.1	24.5	28	28	64	EXAL 95/12
95	16.5	12.9	17.1	24.5	28	28	64	EXAL 95/16
120	10.5	15	19	28.2	32	30	73	EXAL 120/10
120	12.5	15	19	28.2	32	30	73	EXAL 120/12
120	16.5	15	19	28.2	32	30	73	EXAL 120/16
150	10.5	16.5	21.5	30.9	34	34	79	EXAL 150/10
150	12.5	16.5	21.5	30.9	34	34	79	EXAL 150/12
150	16.5	16.5	21.5	30.9	34	34	79	EXAL 150/16
185	10.5	18.6	24	34.6	36	36	84	EXAL 185/10
185	12.5	18.6	24	34.6	36	36	84	EXAL 185/12
185	16.5	18.6	24	34.6	36	36	84	EXAL 185/16
240	12.5	22	28	40	44	44	102	EXAL 240/12
240	16.5	22	28	40	44	44	102	EXAL 240/16
300	16.5	24	31	45.7	47	54	115	EXAL 300/16
300	21	24	31	45.7	47	54	115	EXAL 300/20
400	21	28	36	51	56	61	130	EXAL 400/20
500	21	31	41	58.7	60	65	140	EXAL 500/20
630	21	36	46	66.6	69	69	154	EXAL 630/20
800	Blank	39	51	73.3	77	78	180	EXAL 800/BL
1000	Blank	43.5	57	81.9	100	90	220	EXAL 1000/BL

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Aluminium
- Range: Cable Range from 2.5 to 1000 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of Aluminium conductors to equipment & switch gear panels

Ring Type Cable Lugs

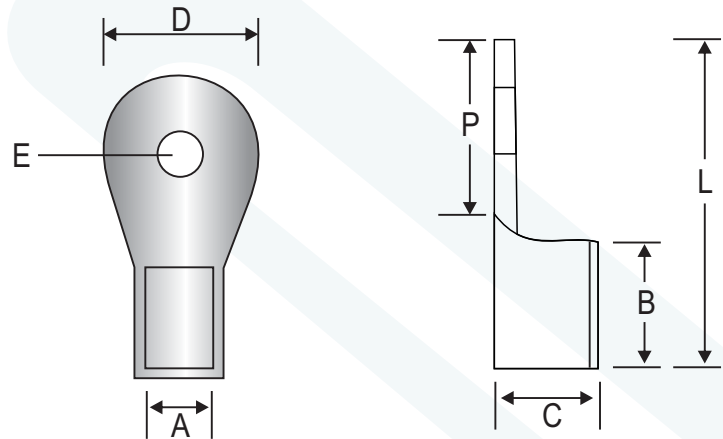


Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
1.5	3.2	1.6	3.2	6	5	7	14	ER-7001
1.5	3.7	1.6	3.2	6	5	7	14	ER-7002
1.5	4.2	1.6	3.2	6	5	7	14	ER-7003
1.5	3.7	1.6	3.2	6.8	5	7	13	ER-7048
1.5	4.2	1.6	3.2	6.8	5	7	13	ER-7049
1.5	4.2	1.6	3.2	8	5	9	16	ER-7004
1.5	5.2	1.6	3.2	8	5	9	16	ER-7005
1.5	4.2	1.6	3.2	7	5	8.5	14.5	ER-7154
1.5	5.2	1.6	3.2	10	5	11	18	ER-7006
2.5	3.2	2.3	3.9	6.5	5	6.7	12.7	ER-7107
2.5	3.7	2.3	3.9	6.5	5	6.7	12.7	ER-7008
2.5	3.7	2.3	3.9	8	5	9	16	ER-7108
2.5	4.2	2.3	3.9	8	5	9	16	ER-7009
2.5	5.2	2.3	3.9	8	5	9	16	ER-7010
2.5	5.2	2.3	3.9	10	5	12	18	ER-7109
2.5	6.4	2.3	3.9	10	5	12	18	ER-7011
2.5	5.2	2.3	3.9	12	5	15	22	ER-7110
4.6	4.2	3.5	5.5	8	6	9	17	ER-7155
4.6	5.2	3.5	5.5	8	6	9	17	ER-7050
4.6	5.2	3.5	5.5	10	6	10	19	ER-7016
4.6	6.4	3.5	5.5	12	6	12	20	ER-7017
4.6	8.2	3.5	5.5	12	6	12	20	ER-7018
4.6	6.4	3.5	5.5	12	6	13	22	ER-7019

Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
4.6	6.4	3.5	5.5	14	6	17.5	25.5	ER-7115
4.6	8.2	3.5	5.5	14	6	17.5	25.5	ER-7020
4.6	8.2	3.5	5.5	16	6	21	30	ER-7116
10	5.2	4.3	6.3	10	8	12	22	ER-7025
10	5.2	4.3	6.3	10	8	9	20	ER-7026
10	10	4.3	6.3	16	8	15	27	ER-7027
10	6.4	4.3	6.3	12	8	13	23	ER-7120
10	8.2	4.3	6.3	16	8	15	27	ER-7121
16	5.2	5.6	8	10	10	11	24	ER-7124
16	6.4	5.6	8	12	10	12	26	ER-7029
16	8.2	5.6	8	16	10	16	30	ER-7030
16	10	5.6	8	22	10	19	35	ER-7032
25	6.4	7.5	11.1	12	11	16	31	ER-7156
25	8.2	7.5	11.1	16	11	14	30	ER-7034
25	10	7.5	11.1	16	11	14	30	ER-7035
35	6.4	9	12.6	16	12	14	31	ER-7133
35	8.2	9	12.6	16	12	14	31	ER-7038
35	10.2	9	12.6	18	12	19	36	ER-7039
50	8.2	10.5	14.1	18	16	21	43	ER-7136
50	10.2	10.5	14.1	22	16	20	43	ER-7137
70	10.2	12	16	22	18	22	47	ER-7140
70	12.7	12	16	24	18	22	48	ER-7141
95	10.2	13.5	18.1	24	20	24	50	ER-7144
95	12.7	13.5	18.1	24	20	24	50	ER-7044
95	16.2	13.5	18.1	28	20	31	58	ER-7145
120	12.7	15	20.2	26	22	20	52	ER-7146
120	16.2	15	20.2	32	22	35	64	ER-7147
120	20.3	15	20.2	40	22	42	74	ER-7148
150	12.7	16.5	23.7	34	24	33	66	ER-7149
150	16.2	16.5	23.7	34	24	33	66	ER-7045
150	20.3	16.5	23.7	34	24	40	74	ER-7046

Technical Data

- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 150 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & circuits.

Connectors - Heavy Duty Long Barrel

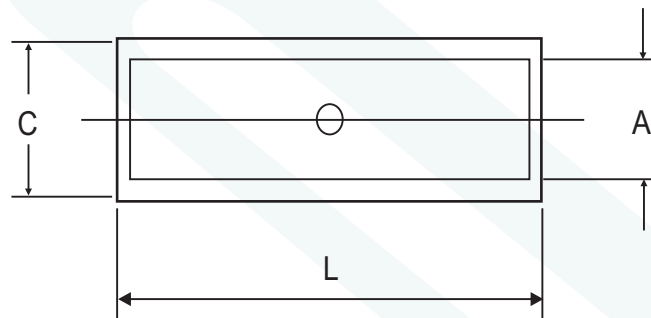


Cable Size	Cable Lug Dimensions			Part No.
	A	C	L	
1.5	1.8	3.7	22	EX FLB 1.5
2.5	2.4	4	22	EX FLB 2.5
4	3.1	4.8	22	EX FLB 4
6	3.8	5.5	22	EX FLB 6
10	4.5	6.2	22	EX FLB 10
16	5.4	7.1	44	EX FLB 16
25	6.8	8.8	47	EX FLB 25
35	8.2	10.6	47	EX FLB 35
50	9.5	12.4	47	EX FLB 50
70	11.2	14.7	50	EX FLB 70
95	13.5	17.4	54	EX FLB 95
120	15	19.4	65	EX FLB 120
150	16.5	21.2	65	EX FLB 150
185	18.5	23.5	65	EX FLB 185
240	21	26.5	89	EX FLB 240
300	23.5	30	89	EX FLB 300
400	28.5	36.5	90	EX FLB 400
500	30	39	115	EX FLB 500
630	35	45	115	EX FLB 630
800	39	50.6	230	EX FLB 800

Technical Data

- All dimensions in mm
- Material: Cable Connectors manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 1000 mm²
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion

Connectors - Heavy Duty Short Barrel

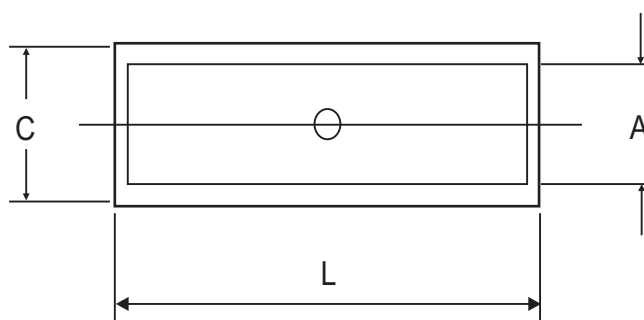


Cable Size	Cable Lug Dimensions			Part No.
	A	C	L	
1.5	1.8	3.7	12	EX FSB 1.5
2.5	2.4	4	15	EX FSB 2.5
4	3.1	4.8	15	EX FSB 4
6	3.8	5.5	15	EX FSB 6
10	4.5	6.2	20	EX FSB 10
16	5.4	7.1	20	EX FSB 16
25	6.8	8.8	32	EX FSB 25
35	8.2	10.6	36	EX FSB 35
50	9.5	12.4	40	EX FSB 50
70	11.2	14.7	45	EX FSB 70
95	13.5	17.4	45	EX FSB 95
120	15	19.4	45	EX FSB 120
150	16.5	21.2	50	EX FSB 150
185	18.5	23.5	60	EX FSB 185
240	21	26.5	80	EX FSB 240
300	23.5	30	85	EX FSB 300
400	28.5	36.5	85	EX FSB 400
500	30	39	100	EX FSB 500
630	35	45	110	EX FSB 630
800	39	50.6	150	EX FSB 800

Technical Data

- All dimensions in mm
- Material: Cable Connectors manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 1000 mm²
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion

T Connectors

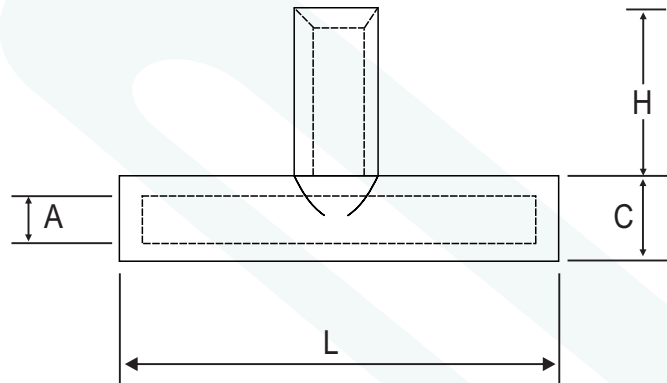


Cable Size	Cable Lug Dimensions				Part No.
	A	C	L	H	
1.5	1.8	3.3	30	12	EX TC 1.5
2.5	2.3	4.2	30	12	EX TC 2.5
4	3	5	30	12	EX TC 4
6	4	6	35	14	EX TC 6
10	4.5	7	35	14	EX TC 10
16	5.5	8.5	50	21	EX TC 16
25	7	10	55	23	EX TC 25
35	8.5	12	70	30	EX TC 35
50	10	14	80	34	EX TC 50
70	12	16.5	85	35	EX TC 70
95	13.5	18	90	36	EX TC 95
120	15	9.5	95	38	EX TC 120
150	16.5	21	110	44	EX TC 150
185	19	24	115	45	EX TC 185
240	21	26	130	52	EX TC 240

Technical Data

- All dimensions in mm
- Material: Cable Connectors manufactured from Electrolytic Copper
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion

Cross Connectors

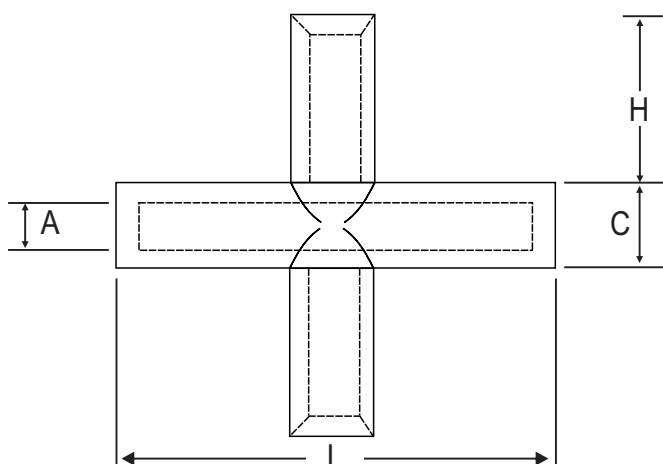


Cable Size	Cable Lug Dimensions				Part No.
	A	C	L	H	
1.5	1.8	3.3	30	12	EX CC 1.5
2.5	2.3	4.2	30	12	EX CC 2.5
4	3	5	30	12	EX CC 4
6	4	6	35	14	EX CC 6
10	4.5	7	35	14	EX CC 10
16	5.5	8.5	50	21	EX CC 16
25	7	10	55	23	EX CC 25
35	8.5	12	70	30	EX CC 35
50	10	14	80	34	EX CC 50
70	12	16.5	85	35	EX CC 70
95	13.5	18	90	36	EX CC 95
120	15	19.5	95	38	EX CC 120
150	16.5	21	110	44	EX CC 150
185	19	24	115	45	EX CC 185
240	21	26	130	52	EX CC 240

Technical Data

- All dimensions in mm
- Material: Cable Connectors manufactured from Electrolytic Copper
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion

Aluminium Connectors

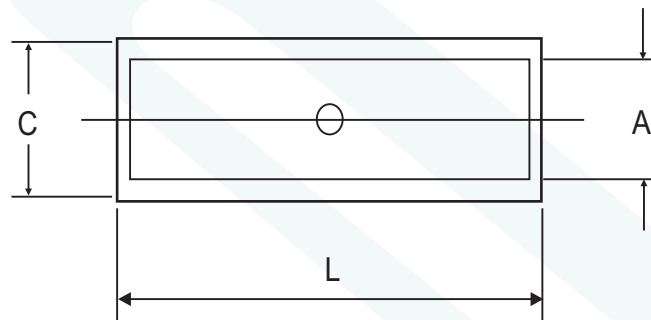


Cable Size	Cable Lug Dimensions			Part No.
	A	C	L	
2.5	2.6	5.5	16	EXALC 2.5
4	2.9	5.5	16	EXALC 4
6	3.5	5.5	16	EXALC 6
10	3.8	6.2	20	EXALC 10
16	5.4	8.3	26	EXALC 16
25	7	9.7	35	EXALC 25
35	8	10.8	40	EXALC 35
50	9.3	13	45	EXALC 50
70	11.6	16	55	EXALC 70
95	12.9	17.1	60	EXALC 95
120	15	19	65	EXALC 120
150	16.5	21.5	70	EXALC 150
185	18.5	24	75	EXALC 185
240	22	28	90	EXALC 240
300	24	31	100	EXALC 300
400	28	36	115	EXALC 400
500	31	41	125	EXALC 500
630	36	46	140	EXALC 630
800	39	51	160	EXALC 800
1000	43.5	57	210	EXALC 1000

Technical Data

- All dimensions in mm
- Material: Cable Connectors manufactured from Aluminium
- Range: Cable Range from 1.5 to 1000 mm²
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion

Ring Type Insulated Cable Lugs

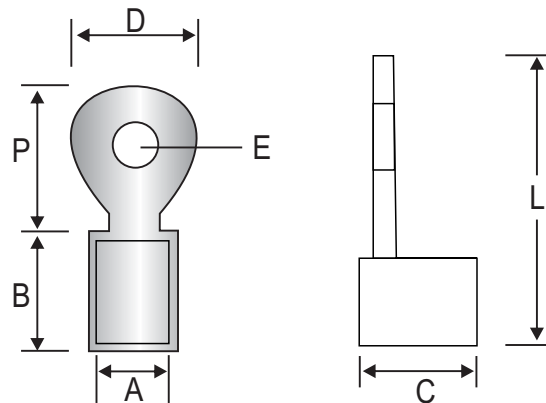


Cable Size	Stud Hole Size	Cable Lug Dimensions						Part No.
	E	A	C	D	B	P	L	
1.5	3.2	1.6	3.2	6	5	7	19	EFI-7055
1.5	3.7	1.6	3.2	6	5	7	19	EFI-7056
1.5	3.7	1.6	3.2	6.8	5	7	18	EFI-7058
1.5	4.2	1.6	3.2	6.8	5	7	18	EFI-7059
1.5	4.2	1.6	3.2	8	5	9	21	EFI-7061
1.5	5.2	1.6	3.2	8	5	9	21	EFI-7062
1.5	4.2	1.6	3.2	7	5	8.5	19.5	EFI-7063
2.5	3.2	2.3	3.9	6.5	5	6.7	17.7	EFI-7068
2.5	3.7	2.3	3.9	6.5	5	6.7	17.7	EFI-7069
2.5	3.7	2.3	3.9	8	5	9	21	EFI-7070
2.5	4.2	2.3	3.9	8	5	9	21	EFI-7071
2.5	5.2	2.3	3.9	8	5	9	21	EFI-7072
2.5	5.2	2.3	3.9	10	5	12	23	EFI-7073
2.5	6.4	2.3	3.9	10	5	12	23	EFI-7074
4-6	4.2	3.5	5.5	8	6	9	25	EFI-7083
4-6	5.2	3.5	5.5	8	6	9	25	EFI-7084
4-6	5.2	3.5	5.5	10	6	10	27	EFI-7086
4-6	6.4	3.5	5.5	12	6	12	28	EFI-7089
4-6	8.2	3.5	5.5	12	6	12	28	EFI-7090
4-6	6.4	3.5	5.5	12	6	13	30	EFI-7092

Technical Data


- All dimensions in mm
- Material: Cable Lugs manufactured from Electrolytic Copper
- Range: Cable Range from 1.5 to 6 mm² with different stud hole
- Finish: Lead Free Electro Tin Plated to prevent atmospheric corrosion
- Application: Used for termination of copper conductors to equipment & circuits.

Pin Type Cable Lugs

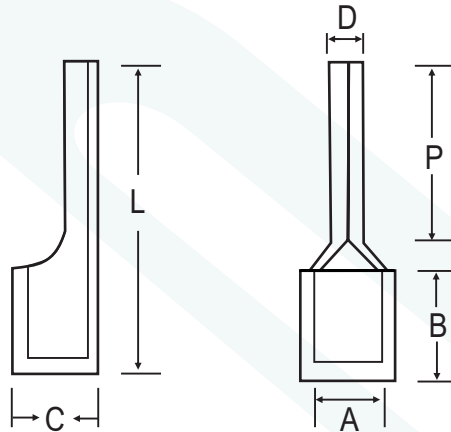


Cable Size	Cable Lug Dimensions						Part No.
	A	C	D	B	P	L	
1.5	1.6	3.2	1.9	5	10	17	EP 9
1.5	1.6	3.2	3.1	5	10	17	EP 35
2.5	2.3	3.9	1.9	5	10	17	EP 1
2.5	2.3	3.9	3.1	5	10	17	EP 2
4	2.9	4.9	2.7	6	10	20	EP 3
6	3.6	5.6	2.7	6	10	20	EP 5
10	4.5	6.7	4.3	8	12	22	EP 7
16	5.8	8.2	5.5	10	13	26	EP 8
25	7.5	11.1	7.2	11	15	33	EP 86
35	9	12.6	8.2	12	15	33	EP 87
50	10.5	14.1	9	16	17	41	EP 88
70	12	16	10	16	16	46	EP 89

Pin Type Insulated Cable Lugs

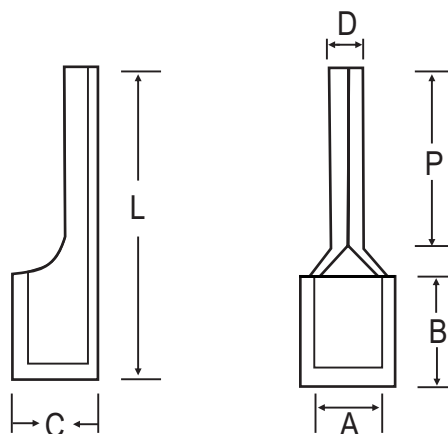

Cable Size	Cable Lug Dimensions						Part No.
	A	C	D	B	P	L	
1.5	1.6	3.2	1.9	5	10	22	EPI-17
1.5	1.6	3.2	3.1	5	10	22	EPI-40
2.5	2.3	3.9	1.9	5	10	22	EPI-18
2.5	2.3	3.9	3.1	5	10	22	EPI-19
4	2.9	4.9	2.7	6	10	28	EPI-20
6	3.6	5.6	2.7	6	10	28	EPI-22
10	4.5	6.7	4.3	8	12	30	EPI-24
16	5.8	8.2	5.5	10	13	36	EPI-25

Fork Type Cable Lugs

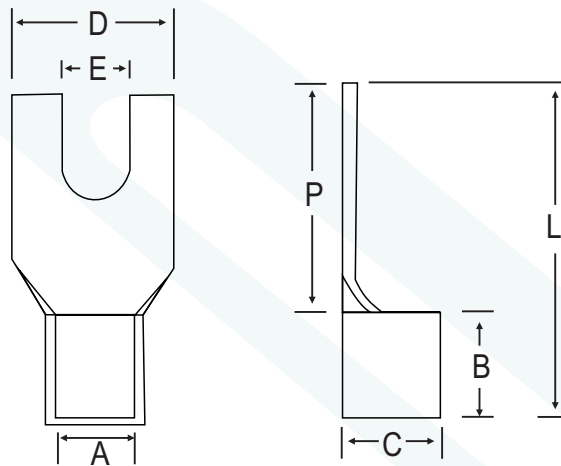

Cable Size	Stud Hole Size E	Cable Lug Dimensions						Part No.
		A	C	D	B	P	L	
1.5	3	2	2.8	6.2	5	5.6	13	EF 8055
1.5	5.1	1.6	3.2	8	5	14	21	EF 7214
1.5	3.5	1.6	3.2	6.8	4	9	13	EF 7249
1.5	3	2	2.8	6.2	5	5.6	13	EF 7250
2.5	3.5	2.3	3.9	6.5	5	7.5	15	EF 7251
2.5	5	2.6	4.6	10.6	6.2	14.8	21	EF 7280
4	3.1	3.5	5.5	6	6	9	15	EF 7252
4	3.5	3.5	5.5	6	6	9	15	EF 7253
10	6.5	4.5	6.9	16	8	19	27	EF 7254
10	8.2	4.5	6.9	16	8	19	27	EF 7255
16	4.4	6.3	8.7	8.9	10	10	23	EF 0131

Other Cable Lugs & Connectors





Customer satisfaction has always been the first and foremost priority at Exar. Right from procurement of raw material till dispatch, special care is taken to ensure that the customer gets high quality products at a competitive price. The products are tested and certified by qualified professionals at each step of the production process, thereby ensuring premium quality. Our commitment to quality does not end with the production process. Special care is taken to ensure customer satisfaction by taking regular customer inputs and feedbacks.

The philosophy at Exar is to achieve excellence in all walks of the process and thereby achieving total customer satisfaction.

The prime focus of our company is to deliver quality products to our customers. Quality is rigorously checked for different parameters and the procurements and tests are conducted under the strict supervision. From raw material to final product packing, various attributes are checked under vigilance of expert supervisors.


Exar is backed by state of the art infrastructure with a dedicated and diligent work force. At Exar, we follow modern and best production processes to achieve optimal result. Our wide distribution network of suppliers and distributors ensures prompt, safe and smooth delivery of the product to the customers.



65-083-8217



AUTHORISED DEALER

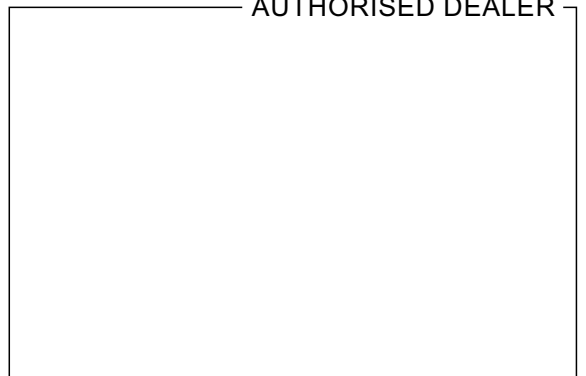

#251, Koilee Talavdi, Nr. G.E.B. Office, Opp. Sangam Residency, Narol, Ahmedabad 382 405, Gujarat, India
Phone : +91 99250 25 821 | E-mail : info@exarindustries.com | Web : www.exarindustries.com